


Rev.	Amendments	Date	Made By	Chk'd By

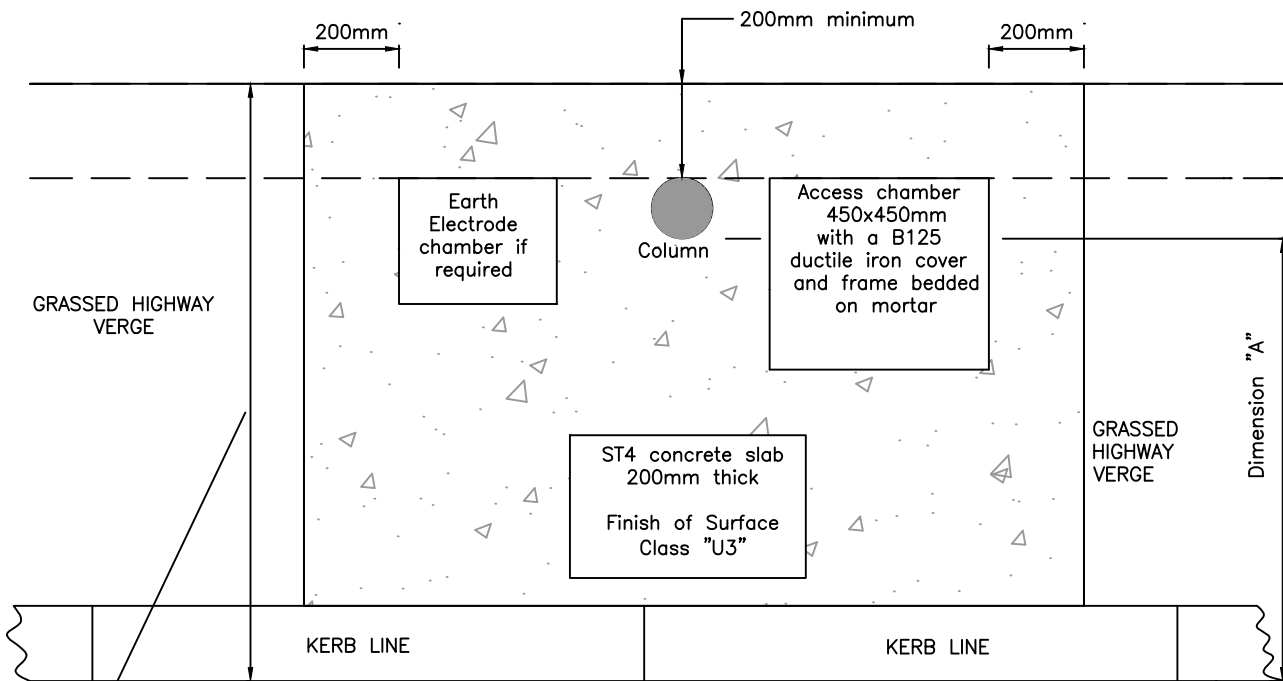

Overall length of concrete slab dependent on location of apparatus

CARRIAGEWAY

Design Speed km/h	Minimum Horizontal Clearance (Dimension "A") m
50	0.80
80	1.00
100	1.50
120	1.50

NOTES

1. The set back of the column in the verge is subject to the design speed of the carriageway. Please refer to adjacent table for details.
2. Concrete slab to be extended a minimum of 200mm behind the back of the street lighting column.

STREET LIGHTING COLUMN, ACCESS CHAMBER AND EARTH ELECTRODE IN HIGHWAY VERGE

COMMON STANDARDS FOR WALES
HIGHWAY DESIGN GUIDE

Drawn	MT
Checked	SZ
Date	Feb '20
Scale	N.T.S.
Drg. No.	721
Rev.	