


Rev.	Amendments	Date	Made By	Chk'd By

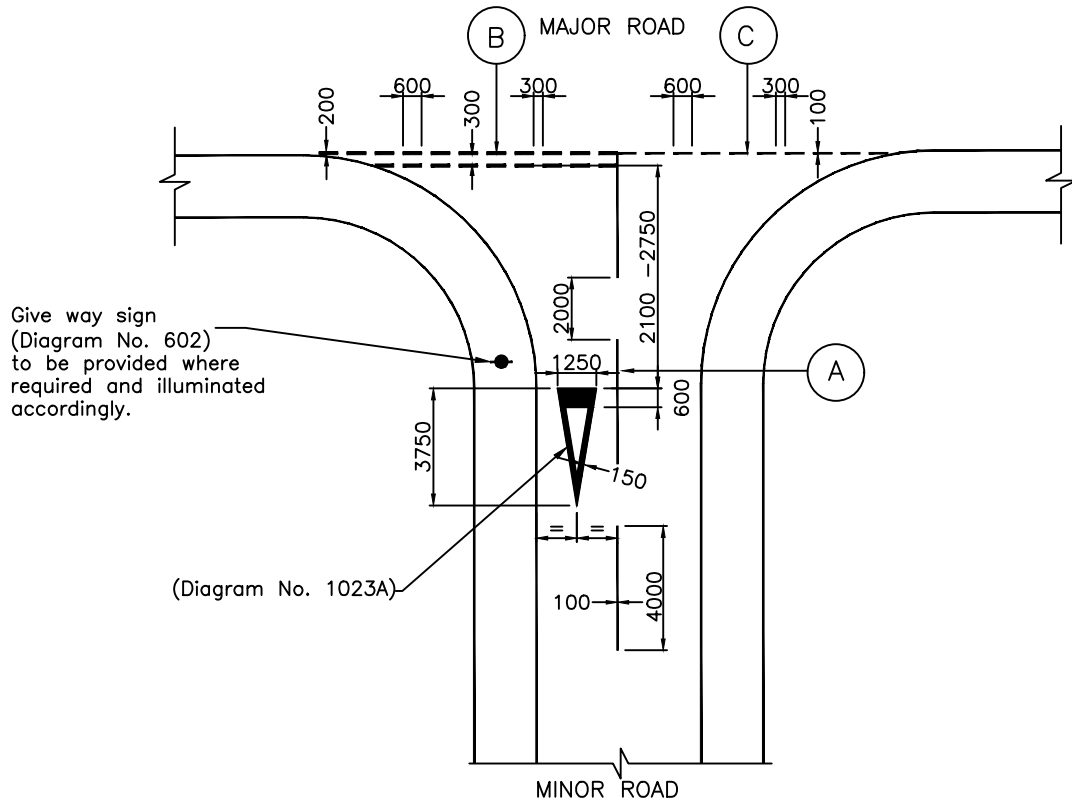

KEY

- A. Minimum of 3 number markings or as specified by the Highway Authority. White 4m mark, 2m gap, 100mm wide. TSRGD Diag. No. 1004.
- B. White 600mm mark, 300mm gap, 200mm wide TSRGD Diag. No. 1003A.
- C. White 600mm mark, 300mm gap, 100mm wide TSRGD Diag. No. 1009A.

NOTES

1. All markings to be of thermoplastic spray or screed with applied solid glass beads and designed in accordance with Chapter 5 of the Traffic Signs Manual (H.M.S.O.). and approved by Rhondda Cynon Taff County Borough Council.
2. Each "GIVE WAY" marking should normally incorporate a minimum of three 4m longitudinal warning lines separated by a 2m gaps. Where the MINOR ROAD average traffic volume is likely to exceed 100 vehicles Per hour then four 4m longitudinal lines with 2m gaps should be provided.
3. All dimensions are in millimetres unless otherwise stated

JUNCTION ROAD MARKINGS
JUNCTIONS WITH PRIMARY ROADS

COMMON STANDARDS FOR WALES
HIGHWAY DESIGN GUIDE

Drawn	MT
Checked	SZ
Date	Feb '20
Scale	N.T.S.
Drg. No.	116
Rev.	