


Rev.	Amendments	Date	Made By	Chk'd By

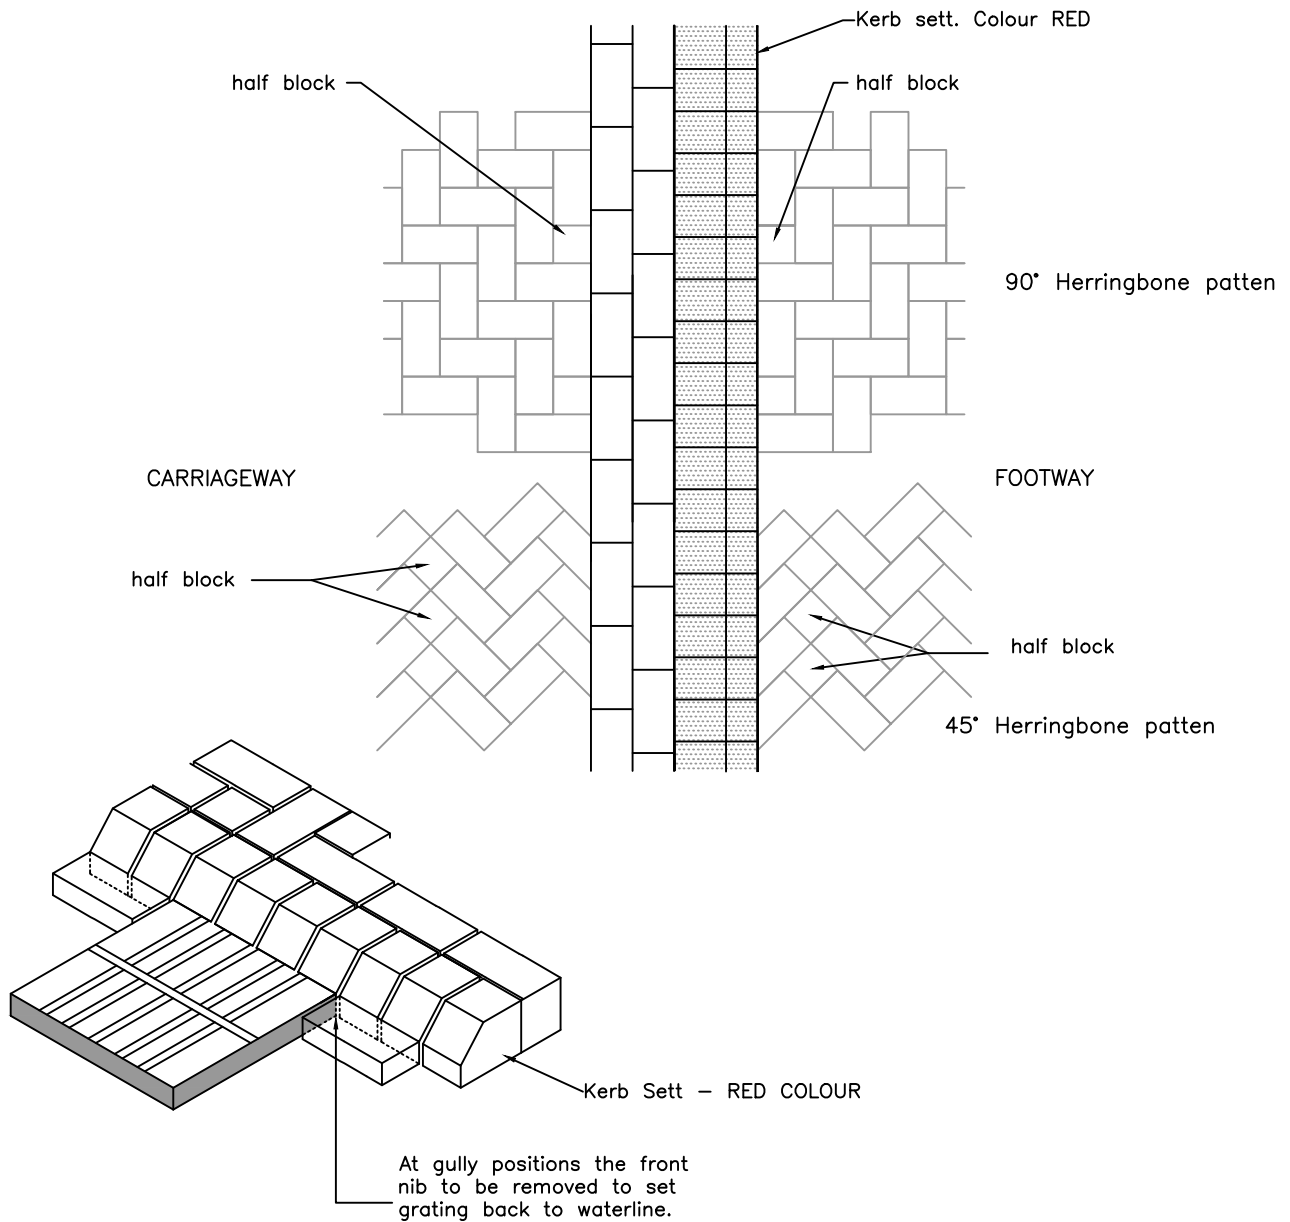

NOTES

1. The minimum longitudinal fall shall be 1 in 80 (1.25%).
2. The minimum cross fall shall be 1 in 32 (3.23%).
3. All blocks to be laid in accordance with B.S. 7533-3
4. Minimum cut size of a block to be used must not be less than 1/3 of the blocks length.
5. Weed killer to be applied at formation level to the approval of the Overseeing Organisation.

MEWS COURT – BLOCK PAVING PATTERN AND
AND GULLY COVER AND FRAME SETTING

COMMON STANDARDS FOR WALES
HIGHWAY DESIGN GUIDE

Drawn	MT
Checked	SZ
Date	Feb '20
Scale	N.T.S.
Drg. No.	208
Rev.	