


Rev.	Amendments	Date	Made By	Chk'd By

//////
PREFERRED VERTICAL CLEARANCE 3.7M

MIN VERTICAL CLEARANCE 3.0M

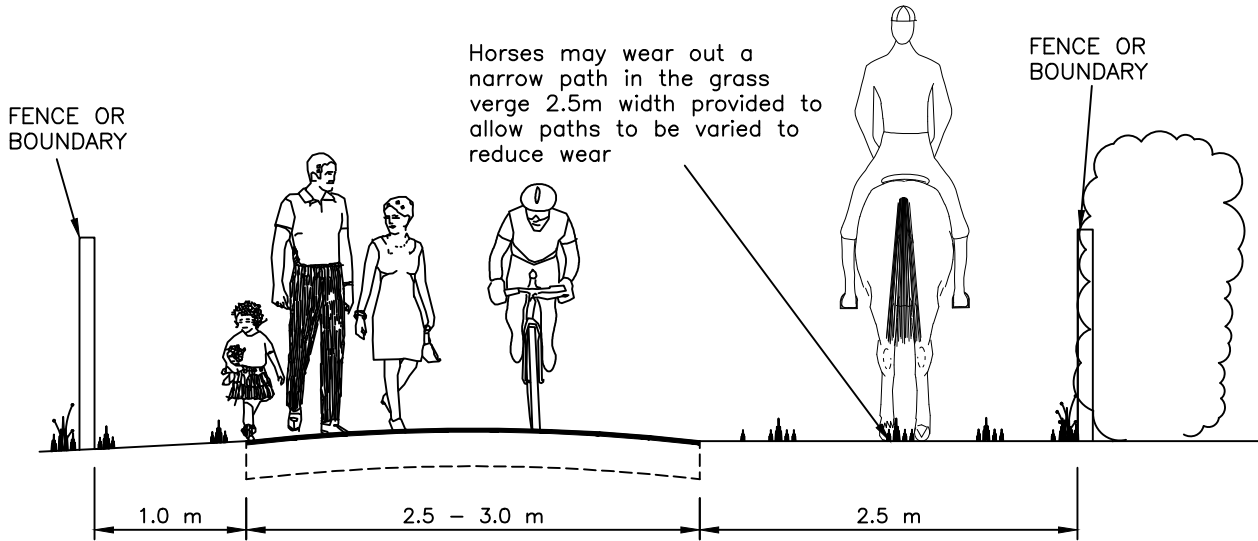


SHARED CYCLE / FOOTPATH WITH SEPARATE BRIDLEPATH

NOTES

Refer to Sustrans Technical Information Note No 28 'Horses on the National Cycle Network', for additional information.

//////
PREFERRED VERTICAL CLEARANCE 3.7M

MIN VERTICAL CLEARANCE 3.0M

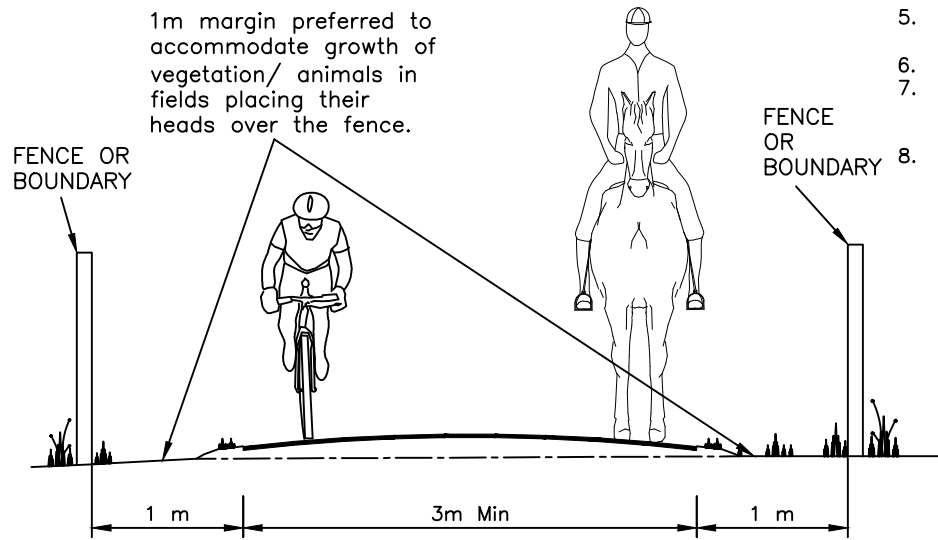

SHARED CYCLE TRACK / FOOTPATH AND BRIDLEPATH

Key Information

1. Dynamic Width of Cyclist 1m.
2. Dynamic Width Horse & Rider 1.5m.
3. Max Width Mobility Scooter 0.85m.
4. Min Width for horserider to pass cyclist 3m.
5. a) Preferred Vertical Clearance 3.7m
b) Minimum Vertical Clearance 3.0m.
6. Height of Bridge parapets to be 1.8m
7. Where barriers are provided to exclude motorcycles suitable gated access must be provided for horses.
8. Consideration should also be given to the provision of:-
 - i) Mounting Blocks.
 - ii) Bridle Gates / Access Controls.
 - iii) Road Crossing facilities.

SHARED CYCLE TRACK FOOTPATH AND BRIDLEWAY ARRANGEMENT

COMMON STANDARDS FOR WALES
HIGHWAY DESIGN GUIDE

Drawn	MT
Checked	SZ
Date	Feb '20
Scale	N.T.S.
Drg. No.	219
Rev.	