


Rev.	Amendments	Date	Made By	Chk'd By

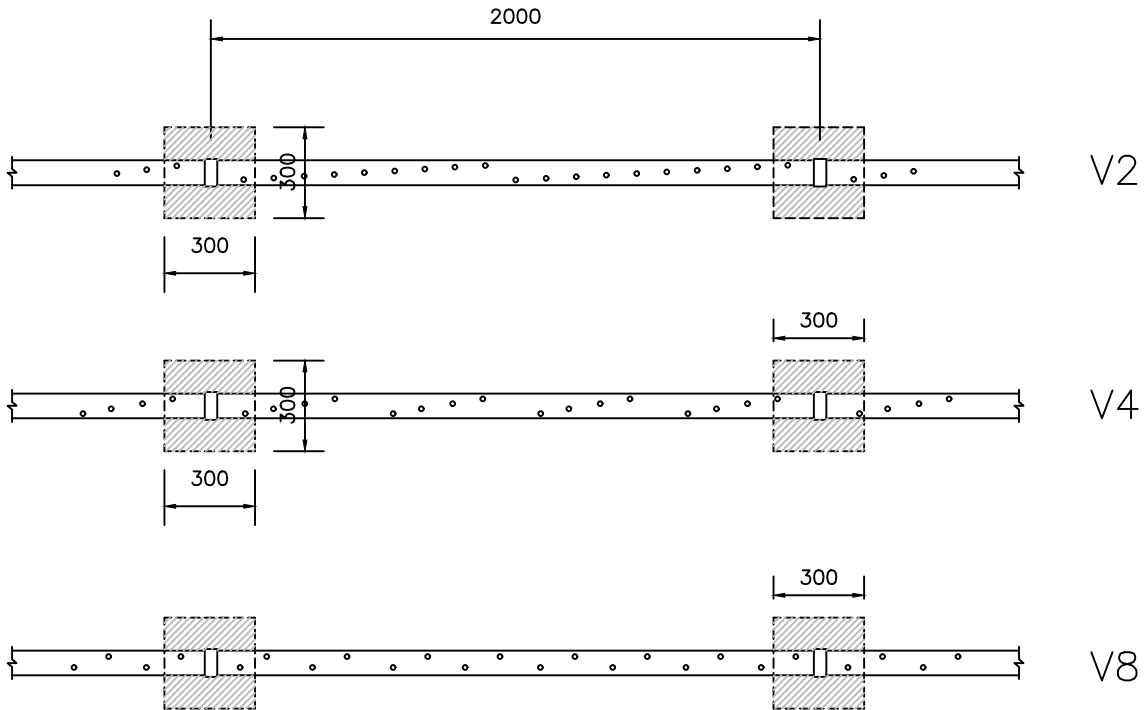

Type	Infill rows	Optimum sight angle	Typical uses
V2	2	2.5 to 5	Straight roads, moderate to high speeds
V4	4	5 to 14	Straight roads, low to moderate speeds. Curves
V8	8	More than 14	Curves less than 15m radius, eg bellmouths

NOTES

1. All dimensions are in millimetres unless otherwise stated.
2. Guardrails to comply with BS 7818 Class A. Modifications can be made to the standard panels to meet with Class B and Class C if required.
3. Finish is to be hot dip galvanised in accordance with BS EN ISO 1461.
4. The guardrail shall be VISIRAIL or similar approved railing.

PEDESTRIAN GUARDRAIL (VISIRAIL)

COMMON STANDARDS FOR WALES
HIGHWAY DESIGN GUIDE

Drawn	MT
Checked	SZ
Date	Feb '20
Scale	N.T.S.
Drg. No.	405
Rev.	