


Rev.	Amendments	Date	Made By	Chk'd By

For all locations use double triangular cover and frame to BS EN 124, D400 Kitemarked with a minimum clear opening of 1220 x 675mm. Cover and frame to be bedded on mortar.

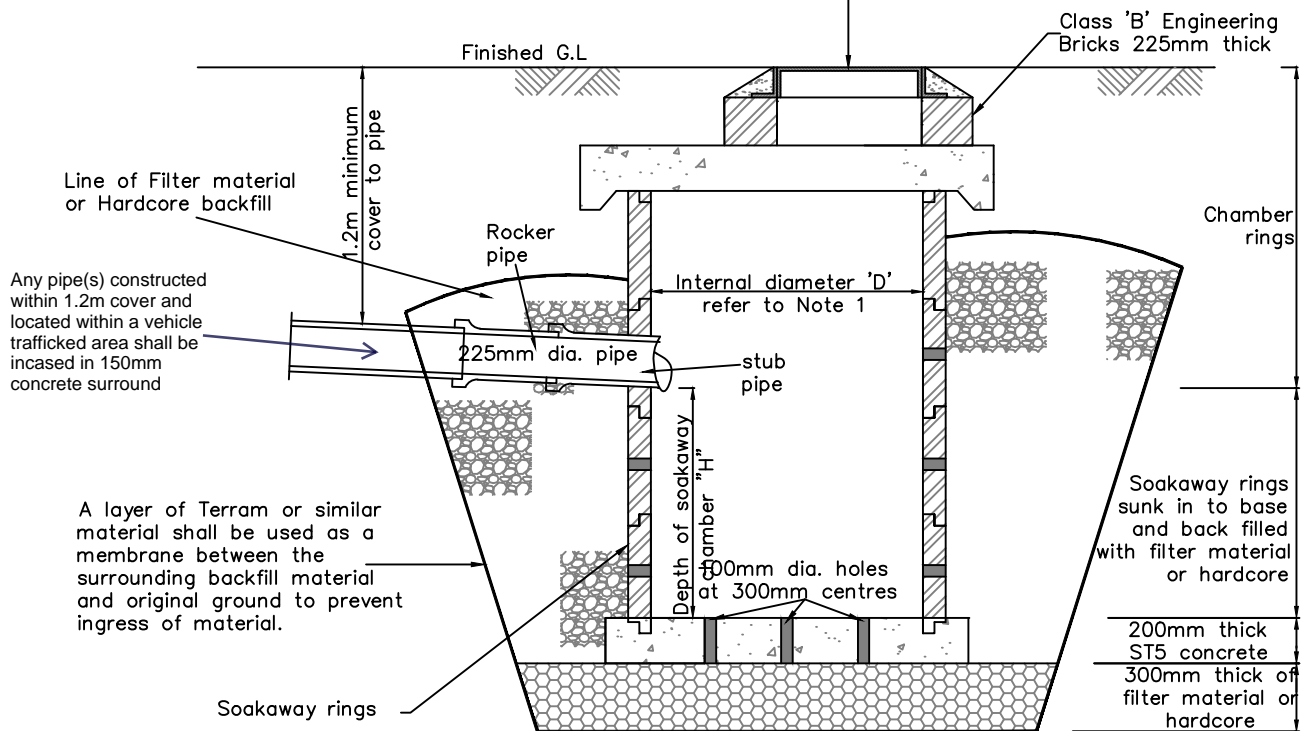

TYPICAL SOAKAWAY

NOTES

1. Soakaway rings come in diameters of 900mm, 1050mm, 1200mm, 1350mm, 1500mm, 1800mm, 2100mm, 2400mm, 2700mm and 3000mm.
2. The storage depth 'H' and internal diameter 'D' will depend on the design of the soakaway.
3. The cover and frame for catch pit and soakaway shall be double triangular to BS EN 124, D400, Kitemarked with minimum clear opening of 1220 x 685mm.
4. Access for a maintenance vehicle must be provided.
5. Concrete mowing strip required around manhole covers 500mm wide by 150mm deep
6. Catchpit to be provided before entry into soakaway.

SOAKAWAY

COMMON STANDARDS FOR WALES
HIGHWAY DESIGN GUIDE

Drawn	MT
Checked	SZ
Date	Feb '20
Scale	N.T.S.
Drg. No.	515
Rev.	